
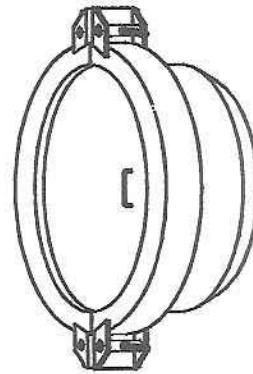


Pigs

Unlimited, Inc.

Closures

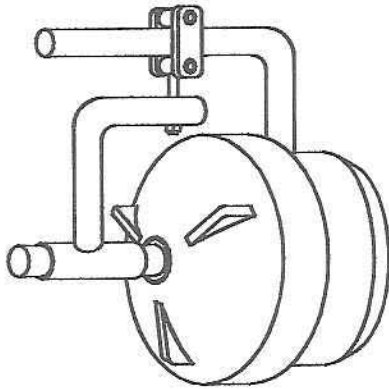

Threaded

SIZE	LENGTH	WEIGHT	VOLUME
2"	5"	10	0.01
3"	6"	15	0.03
4"	7"	20	0.06
6"	8"	50	0.20
8"	9"	70	0.35
10"	10"	100	0.50
12"	11"	150	1.00
14"	12"	170	1.50
16"	27"	415	4.00
18"	28"	450	5.00
20"	29"	550	7.00
22"	30"	700	8.00
24"	31"	800	10.00
26"	32"	1150	12.00
28"	33"	1250	15.00
30"	34"	1500	18.00
32"	35"	1700	21.00
34"	36"	1900	24.00
36"	37"	2050	28.00
38"	38"	2150	32.00
40"	40"	2550	37.00
42"	42"	2825	43.00
44"	45"	3200	50.00
46"	46"	3650	56.00
48"	48"	3950	64.00

Quick-Opening

SIZE	LENGTH	WEIGHT	VOLUME
2"	5"	10	0.01
3"	6"	15	0.03
4"	7"	20	0.06
6"	8"	50	0.20
8"	9"	70	0.35
10"	10"	100	0.50
12"	11"	150	1.00
14"	12"	170	1.50
16"	27"	415	4.00
18"	28"	450	5.00
20"	29"	550	7.00
22"	30"	700	8.00
24"	31"	800	10.00
26"	32"	1150	12.00
28"	33"	1250	15.00
30"	34"	1500	18.00
32"	35"	1700	21.00
34"	36"	1900	24.00
36"	37"	2050	28.00
38"	38"	2150	32.00
40"	40"	2550	37.00
42"	42"	2825	43.00
44"	45"	3200	50.00
46"	46"	3650	56.00
48"	45"	3950	64.00

Specifications

Field weldable hubs forged from carbon steel in SA-350 and SA-105. Caps from SA-350-LF2 and SA-516-Gr. 70 carbon steel meet ASTM and ASME Section VIII, Division I. Mating threads are wide pitch ACME (for threaded type). Hinge is designed to allow custom adjustment after installation.

Applications

Used for case in gaining internal access for launchers and receivers, or for any pipe or pressure vessel.

Options

Horizontal, vertical, or angle mounting; left or right-handed orientation; ANSI class 150 through 2500; ASME code stamp; NACE MR-01-75 certified; various elastomer compound o-rings; customer-specified external coating; hinged assembly; pressure warning device.

email: sales@pigsunlimited.com

23802 FM 2978, Suite B3 • Tomball, Texas 77375 • Tel: 281-351-2749 • Fax: 281-351-4658 • Toll-free: 800-578-7436

www.pigsunlimited.com